



Pearleye

P-007 LWIR

- Maintenance free sensor
- Temperature range up to +200 °C
- Detects temperature differences less than 80 mK

Description

LWIR camera, microbolometer sensor, 320 x 240 pixels

*** Last time buy - December 15th, 2016 ***

*** Last time shipment - June 15th, 2017 ***

*** Last time repair service - June 15th, 2021 ***

The Pearleye P-007 LWIR camera incorporates an uncooled microbolometer sensor with 320 x 240 pixels resolution. With its maintenance-free sensor, a temperature reference element, and a Peltier temperature stabilization, the camera reliably detects temperature differences <80 mK. Built-in image correction features ensure an excellent image quality.

Benefits and features:

- Amorphous silicon uncooled microbolometer focal plane array (FPA), 320 x 240 pixels, sensor time constant 7 ms
- 35 #m x 35 #m cell size, effective chip size 11.2 x 8.4 mm#
- Spectral response: 8 - 14 #m (LWIR)
- NETD \leq 80 mK@ 303 K @ f/1.0
- Temperature measurement range: -20 #C to +80 #C @ f/1.0
- Temperature reference element and Peltier temperature stabilizing
- Frame rate 40 fps (40 Hz)
- Built-in electromechanical calibration shutter
- Preprocessing functions included
- Including 18 mm lens, f/1.0 (field of view: 34.6# x 26.3#)
- Options
 - 12 mm lens, f/0.85
 - 35 mm lens, f/1.0
 - Other lenses on request




Models:

Pearleye P-007 LWIR, temperature monitoring range -20 °C to +80 °C

Pearleye P-007 LWIR High Temp, temperature monitoring range 0 °C to +200 °C

Specifications

Pearleye	P-007 LWIR
Interface	IEEE 802.3 1000baseT
Resolution	320 (H) × 240 (V)
Spectral range	LWIR, 8 μm to 14 μm
Sensor	ULIS UL 03 08 1
Sensor type	Microbolometer
Cell size	35 μm × 35 μm
Lens mount	M65 x 0.5
Max frame rate at full resolution	40 fps
Temperature measurement	-20 °C to +80 °C, High temp version: 0 °C to +200 °C
Netd	≤ 80 mK @ 303 K @ f/1.0
ADC	14 bit
Image buffer (RAM)	
Output	
Bit depth	12 bit
Mono modes	Mono12
Operating conditions/dimensions	
Operating temperature	0 °C to +35 °C
Power requirements (DC)	12 V
Power consumption (@12 V)	18 W
Mass	830 g
Body dimensions (L × W × H in mm)	133.7 × 90 × 86 (including lens and connectors)
Regulations	CE (2004/108/EC), RoHS (2011/65/EU)

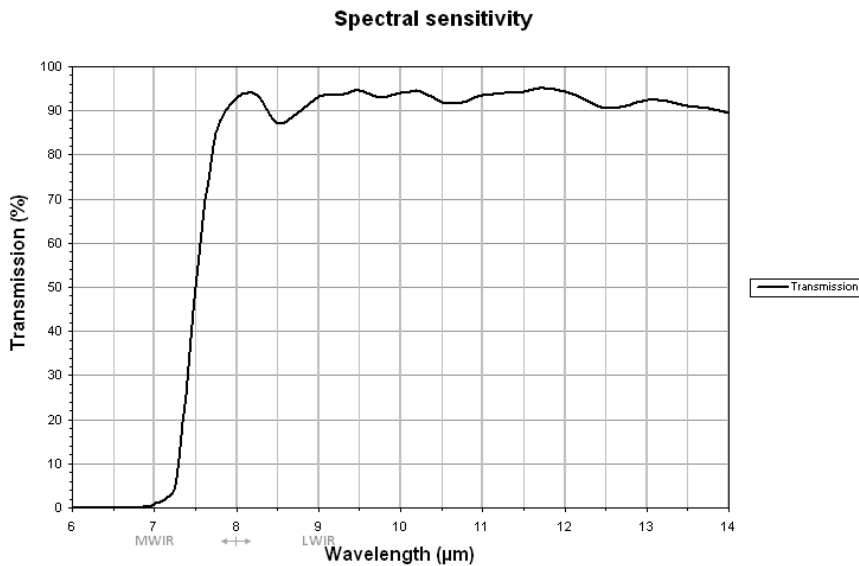

Features

- Shipped with various built-in correction data sets
- Factory adjusted bad pixel correction
- Background (FPN) correction
- Gain/offset correction (NUC/non-uniformity correction) for each pixel
- Drift compensation
- Temperature linearization (LUT)
- Continuous mode (image acquisition with maximum frame rate)

In combination with AVT's AcquireControl software, extensive image analysis functions are available:

- Pseudo color LUT with several color profiles
- Auto contrast
- Auto brightness
- Temperature measurement
- Analyze multiple regions (rectangular, circle) within the image
- Real-time statistics and histogram display

Applications

The Pearleye P-007 LWIR is a maintenance-free, robust, compact LWIR camera with excellent image quality and precise temperature measurement. It detects subtle temperature differences with high precision.



- OEM Applications
- Surveillance
- Automation
- Quality control
- Science and research



Pearleye

P-030 LWIR

- Maintenance free sensor
- Detects temperature differences less than 80 mK

Description

LWIR camera, microbolometer sensor, 640 x 480 pixels, NETD < 80 mK

*** Last time buy - December 15th, 2016 ***

*** Last time shipment - June 15th, 2017 ***

*** Last time repair service - June 15th, 2021 ***


The Pearleye P-030 LWIR camera incorporates an uncooled microbolometer sensor with 640 x 480 pixels resolution. With its maintenance-free sensor, a temperature reference element, and a Peltier temperature stabilization, the camera reliably detects temperature differences. Image correction features ensure an excellent image quality.

Benefits and features:

- Amorphous silicon uncooled microbolometer focal plane array (FPA), 640 x 480 pixels, sensor time constant 7 ms
- 25 #m x 25 #m cell size, effective chip size 16 mm x 12 mm
- Spectral response: 8 to 14 #m (LWIR)
- NETD# ≤ 80 mK@ 303 K @ f/1.0#
- Temperature range: -20 #C to +80 #C @ f/1.0
- Temperature reference element and Peltier temperature stabilizing
- Frame rate 24 fps
- Built-in electromechanical calibration shutter
- Preprocessing functions included
- Including 18 mm lens, f/1.0, Field of View 47.9# x 36.9#
- Options
 - Other lenses available on request

Specifications

Pearleye	P-030 LWIR
Interface	IEEE 802.3 1000baseT
Resolution	640 (H) × 480 (V)
Spectral range	LWIR, 8 μm to 14 μm
Sensor	ULIS UL 04 17 1
Sensor type	Microbolometer
Cell size	25 μm × 25 μm
Lens mount	M65 × 0.5
Max frame rate at full resolution	24 fps
Temperature measurement	-20 °C to +80 °C
Netd	< 80 mK@ 303 K @ f/1.0
ADC	14 bit
Image buffer (RAM)	
Output	
Bit depth	14 bit
Mono modes	Mono14
Operating conditions/dimensions	
Operating temperature	0 °C to +35 °C (ambient)
Power requirements (DC)	12 V
Power consumption (@12 V)	18 W
Mass	760 g
Body dimensions (L × W × H in mm)	133.7 × 90 × 86 (including lens and connectors)
Regulations	CE (2004/108/EC), RoHS (2011/65/EU)

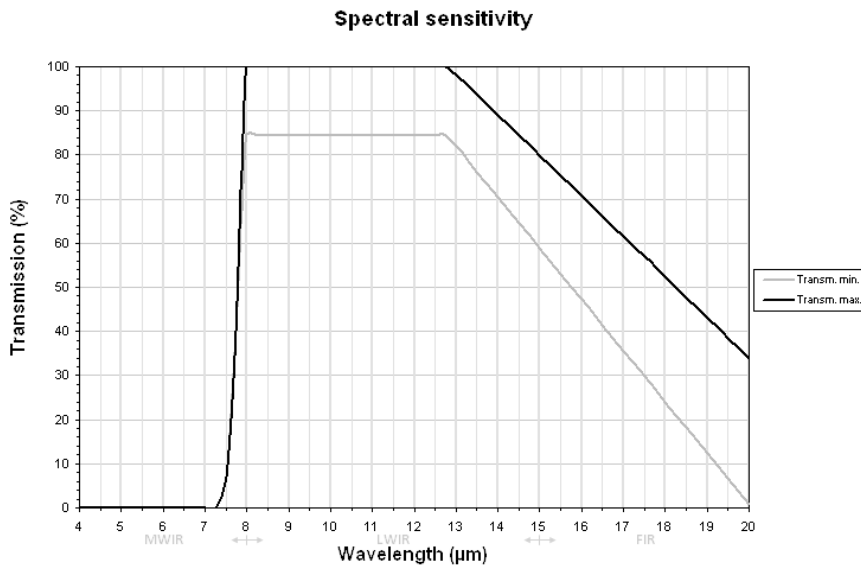

Features

- Shipped with built-in correction data sets
- Factory adjusted bad pixel correction
- Background (FPN) correction
- Gain/offset correction (NUC / non-uniformity correction) for each pixel
- Drift compensation
- Temperature linearization (LUT)
- Continuous mode (image acquisition with maximum frame rate)

In combination with Allied Vision's AcquireControl software, extensive image analysis functions are available:

- Pseudo color LUT with several color profiles
- Auto contrast
- Auto brightness
- Temperature measurement
- Analyze multiple regions (rectangular, circle) within the image
- Real-time statistics and histogram display
- Background (FPN) correction



Applications

The Pearleye P-030 LWIR is a maintenance-free, robust, compact LWIR camera with excellent image quality and precise temperature measurement. It detects subtle temperature differences with high precision.

- OEM Applications
- Surveillance
- Automation
- Quality control
- Science and research