

## FS-1 Series Light Duty Footswitches

### Features

- Low cost foot switch for light to medium duty application
- Available in standard model and ergonomic (front hinged) model
- Black painted steel housing with nonskid base pad and foot treadle pad
- Switch rating: 10A/15A (1/2HP) 125/250V AC
- Operating temperature range: -20°C to +80°C (-4°F to + 176°F)
- UL/cUL approved (E321073)
- IP20 for standard version

### Selection Guide:


FS-1	-	10	-	D	-	-	P	-	Twin	-	8-18/3
		Electrical Rating		Option #1		Option #2	Option #3		number of pedal		Wiring Information e.g. 8 ft 18AWGx3
		10: 10A /250VAC 15: 15A/ 250VAC		Blank: Momentary D: Maintained		Blank: Standard H: Front Hinged	P: Supplied with 3 prong series plug G: with Protective Guard K: Gold plated contact		Blank: Single pedal Twin: Dual Pedal n-pedal		

### Dimensions:

#### FS-1-10




#### Standard model

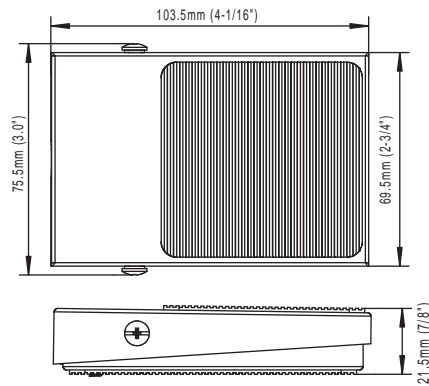

#### FS-1-10-H




#### Front hinged (suffix add -H)

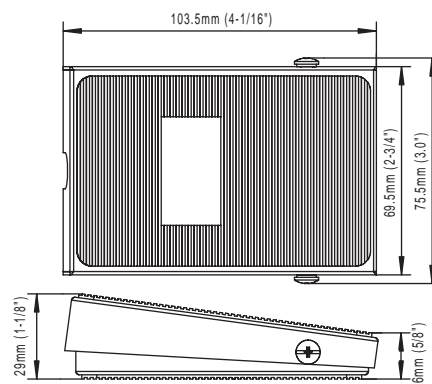


## FS-1 Series Light Duty Footswitches


FS-1-10-D

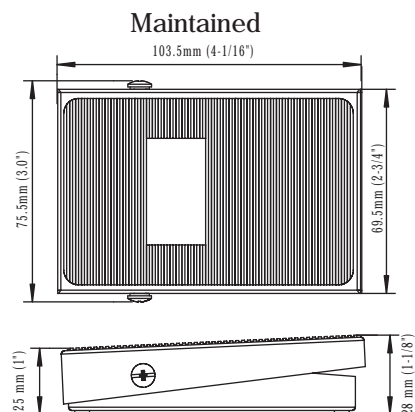

FS-1-10(Twin)

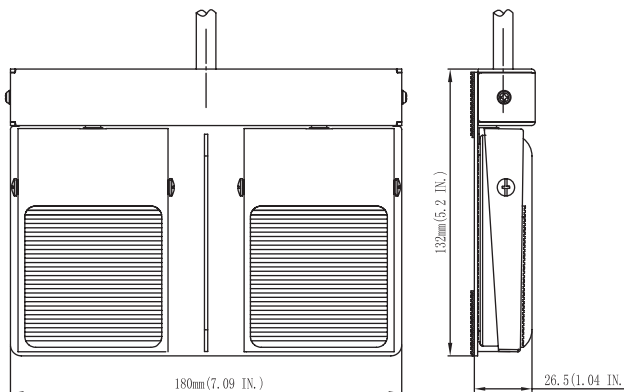


FS-1G-10

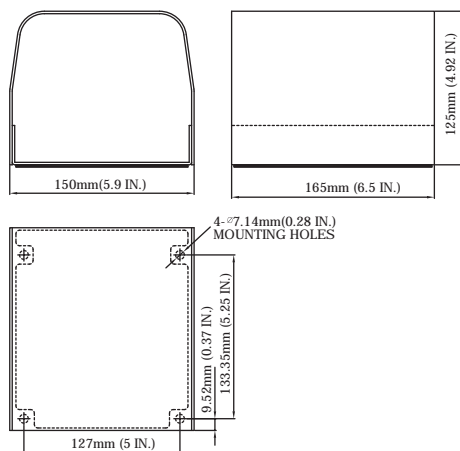


## FS-1 Series Light Duty Footswitches

FS-1G-10 (Twin)

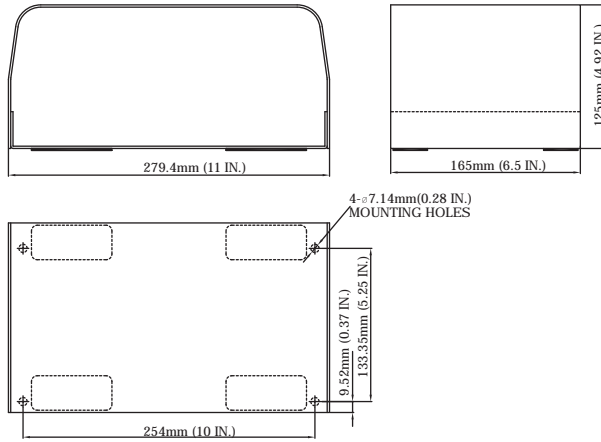

FS-1G

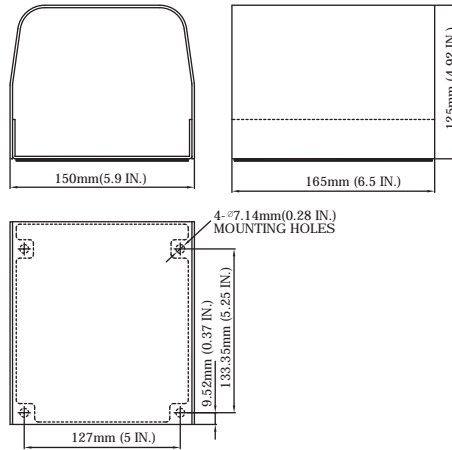

FS-TG

