




Product Highlights


- Intense illumination for large areas where specular reflection is not a problem
- Available in the RGB "All Color" version



General Specifications

Electrical Specifications	Color	24v Current	All Other Controls
	625, 660, 880	0.6 A	0.3 A Max
	395, 470, 520, WHI RGB	0.4 A	0.2 A Max
Normal Operating Temperature	0 - 60°C		
Weight (g)	312.1g (11.01 oz) for standard mounting option		
Standard Cable Information	Up to 2 meters (80") long - 105°C rated PVC jacket, foil shield with drain.		
Photobiological Risk Factor IEC 62471	Exempt Applicable Wavelengths: 880 Group 1 (Low-Risk) Applicable Wavelengths: 470, 520, 625, 660, WHI, RGB Group 2 (Moderate Risk) Applicable Wavelengths: 395		
Compliance	  		
IP Rating	IP40		
Lumen Maintenance	L70 = 50,000 hours		

Mechanical Specifications

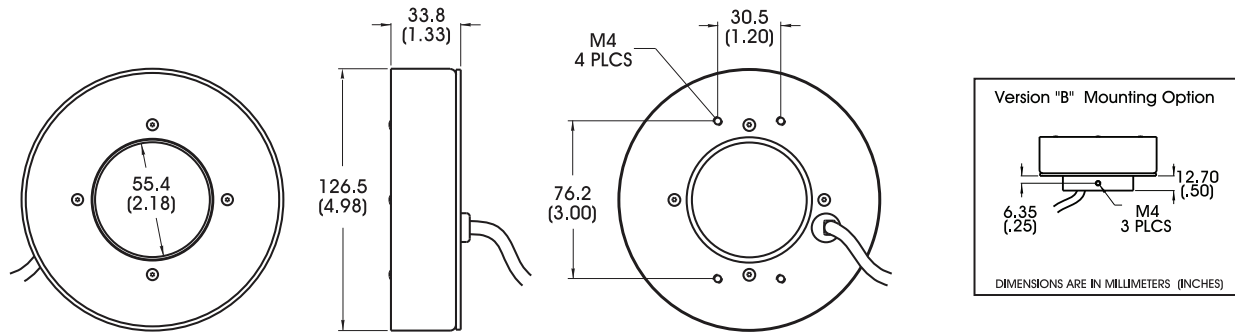


DIMENSIONS ARE IN MILLIMETERS (INCHES)

Part Number Key

Model	Mounting Options	—	Spectral Wavelength	Stand Off	Field of View	Connector/ Control	Optional Lighting Condition	—	Alternative Connector
RL36120	XXX	—	XXX	XXX	XXX	XX	X	—	XXX
RL36120	leave blank for standard or B (barrel)		(UV) 395 ³ (blue) 470 (green) 520 (red orange) 625 (red) 660 (infra red) 880 (white) WHI (all color) RGB ²	See chart to compute standoff	XS S M L XL XXL	C1 C5 I3 I3S 24	D (diffuser) P ⁴ (polarizer)		M12 ¹
Ex: RL36120-395100XXLICD RL36120B-625200XLI3P-M12							¹ Available with IC, I3, I3S and 24v options only ² Available with C1, C2 and 24 options only ³ Not available with IC or 24 options ⁴ Not available with UV option (blue) 470 will reduce the life of the polarizer		

Stock Product: *shipped within 3 days*
None

Build to Order: *shipped within 2 weeks*

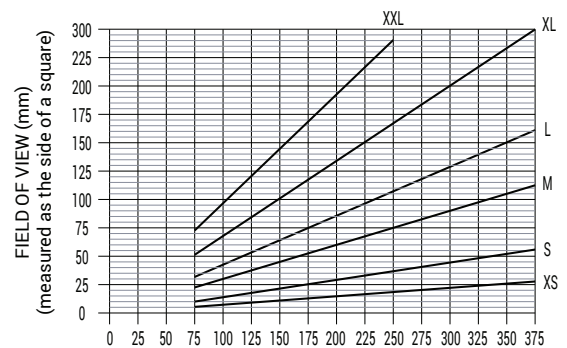

Standoff From Object to Light Head (mm)


* Identify desired FOV and standoff, then specify nearest illuminated area size

Connector | Control Options

C1 Connector For use with: DCS Series Controllers	C5 Connector For use with: Pulsar 320 Strobe Controller.	ICS 2 (IC) Continuous in-line controller Powered with: 24V power supply	ICS 3 (I3) Combination strobe/continuous in-line controller Powered with: 24V power supply	ICS 3S (I3S) Default-OFF strobe/continuous in-line controller Powered with: 24V power supply	24 Flying/tinned leads Powered with: 24V power supply
---	--	--	--	--	---


Optical Performance

Intensity Distribution

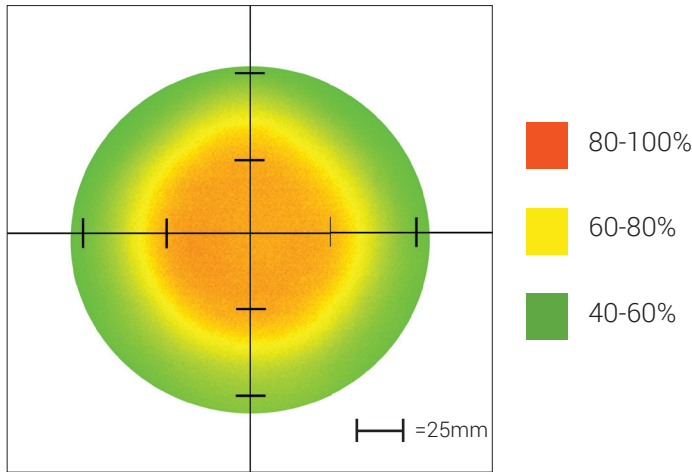

Optical measurement taken using RL36120-625200XLIC @ 300 mm

Area of Illuminance & Intensity

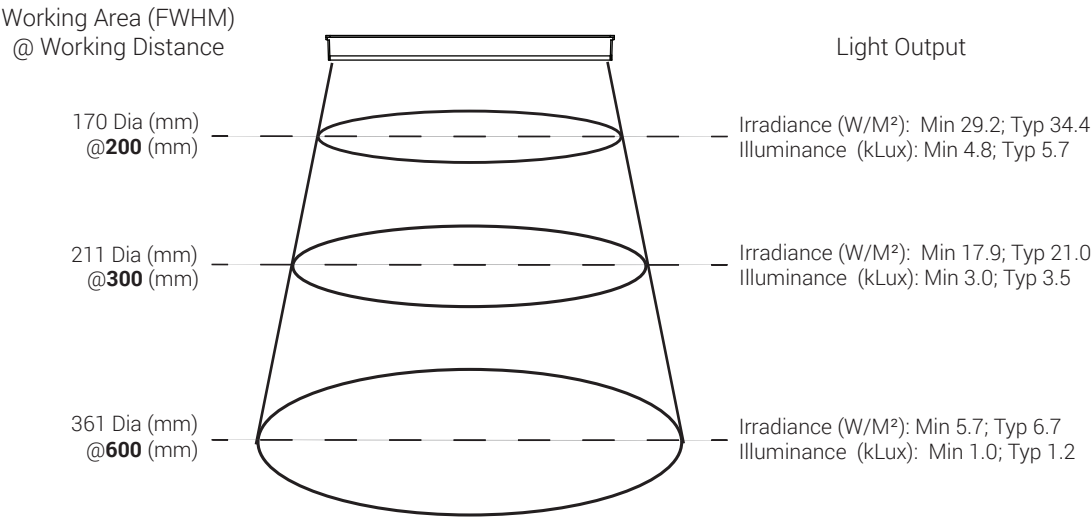


Operation and Wiring

ICS 2 (IC)		
Pin (M12)	Function	Wire Color
1	+24 VDC	Brown
2	0-10 VDC Analog Control	White
3	DCGND	Blue
4	GLO	Black

ICS 3 (I3 and I3S)		
Pin (M12)	Function	Wire Color
1	+24 VDC	Brown
2	Reserved	White
3	GND	Blue
4	PNP/Active High Trigger	Black
5	0-10 VDC Analog Control	Gray

24 Volt		
Pin (M12)	Function	Wire Color
1	+24 VDC	Brown
2	N/A	White
3	GND	Blue
4	N/A	Black



Warranty Information

Every Advanced illumination, Inc. (Ai) product is thoroughly inspected and tested before leaving the factory. Products are warranted to be free of defects in workmanship and materials for a period of two years from the original date of purchase. Should a defect develop during this period, please contact Ai Customer Service or your Ai distributor for a Return Merchandise Authorization (RMA), and return the complete product, freight prepaid, to Ai. If a defect is found, Ai will - at our discretion - repair or replace the product without charge. Ai claims no liability for any implied warranties, including "merchantability" and "fitness for a specific purpose."

Electromagnetic Compatibility

This product was tested and complies with the regulatory requirements and limits for electromagnetic compatibility (EMC) as stated in the product specifications. These requirements and limits are designed to provide reasonable protection against harmful interference only when the product is operated in its intended industrial electromagnetic environment. To minimize the potential for electromagnetic interference or unacceptable performance degradation, install and use this product in strict accordance with the instructions in the product documentation.

Customer Service

For information on existing orders, or to make an order adjustment, contact us Monday through Friday 8:00 am to 5:00 pm, EST or send an email to orders@advill.com.

Company Information

Advanced Illumination

440 State Garage Road, Rochester VT. 05767

Phone: 802.767.3830

Fax: 802.767.3831

Email: info@advancedillumination.com

Web: advancedillumination.com

© 2015 Advanced Illumination Inc. All rights reserved