


[Home Page](#)   [About Skamar](#)   [Catalog](#)  
[Contact Skamar](#)


**PRODUCT FEATURES AND BENEFITS**

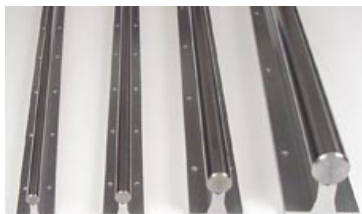

Shaft support assemblies and rails provide an economical means of mounting hardened and precision ground shafting. These shaft supports conform to standard industry specifications and can be used for continuous or intermittent support. The design of the shaft support includes a machined reference edge on one side for easy mounting and installation. Standard shaft support rails are ready to ship from stock for your immediate requirements. These shaft supports would normally be used in conjunction with open pillow blocks incorporating either linear ball bearings or self-lubricating bearings depending on the type of application. Skamar Machine Company also provides complete in-house machining capabilities offering total solutions in this product range for your linear motion requirements. Most importantly, we provide you consistently with the best delivery in the industry on standard and engineered shaft supports.

**PREDRILLED SHAFT SUPPORT ASSEMBLIES AND RAILS**

SHAFT DIA.	SHAFT SUPPORT ASSEMBLY	PREDRILLED SHAFT SUPPORT RAIL	*PLAIN SHAFT SUPPORT RAIL	A +/- .001	B	C	D	E +/- .005
1/2	SMRA-8	SMR-8-PD	SMR-8	1.125	1-1/2	1/4	3/16	1.000
5/8	SMRA-10	SMR-10-PD	SMR-10	1.125	1-5/8	5/16	1/4	1.125
3/4	SMRA-12	SMR-12-PD	SMR-12	1.500	1 3/4	3/8	1/4	1.250
1	SMRA-16	SMR-16-PD	SMR-16	1.750	2-1/8	1/2	1/4	1.500
1-1/4	SMRA-20	SMR-20-PD	SMR-20	2.125	2-1/2	9/16	5/16	1.875
1-1/2	SMRA-24	SMR-24-PD	SMR-24	2.500	3	11/16	3/8	2.250
2	SMRA-32	SMR-32-PD	SMR-32	3.250	3-3/4	7/8	1/2	2.750

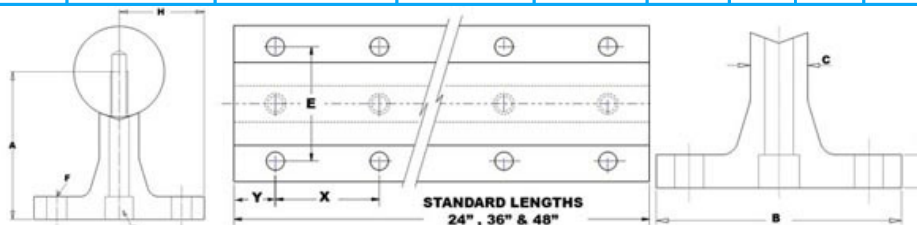

SHAFT DIA.	F BOLT	F HOLE	G SCREW	G HOLE	H +/- .001	X	Y	WEIGHT FT/LBS
1/2	6	.169	6-32 X 7/8	.169	.750	4	2	.6
5/8	8	.193	8-32 X 7/8	.193	.812	4	2	.8
3/4	10	.221	10-32 X 1 1/4	.221	.875	6	3	1.0
1	1/4	.281	1/4-20 X 1 1/2	.281	1.062	6	3	1.4
1-1/4	5/16	.343	5/16-18 X 1 3/4	.343	1.250	6	3	2.1
1-1/2	5/16	.343	3/8-16 X 2	.406	1.500	8	4**	2.6
2	3/8	.406	1/2-13 X 2 1/2	.531	1.875	8	4**	4.2

**NOTES:**

- (\*) DOES NOT INCLUDE ANY HOLES IN SHAFT SUPPORT
- (\*\*) SMR-24-PD-36" AND SMR-32-PD-36" (Y=2")
- MANUFACTURED FROM EXTRUDED 6061-T6 ALUMINUM FOR ENGINEERED PERFORMANCE
- CUSTOM SHAFT SUPPORT AND ASSEMBLIES INQUIRES CAN BE FAXED TO:(216)249-8674 OR EMAILED TO: [info@skamar.com](mailto:info@skamar.com)

[HOME](#) | [ABOUT SKAMAR](#) | [CATALOG](#) | [CONTACT SKAMAR](#)

©Copyright 2007 SKAMAR All Rights Reserved

The data and specifications in this publication are believed to be accurate and reliable. However, it is the responsibility of the product user to determine the suitability of Skamar Machine products for a specific application. While defective products will be replaced without charge if promptly returned, no liability is assumed beyond such replacement.