


MAKING ENGINEERING EASY WITH PRE-ENGINEERED SOLUTIONS

RV-N KITS

- Complete Pre-Engineered Solution for the RV-N Series
- Extreme Precision
- Less than 1 arcmin of Backlash
- Quick and Easy Assembly
- Standard Kits in Stock
- Custom Engineered Kits in 1-2 Days

RH-V KIT INCLUDES:

- Input Pinion
- RV-N Middle Flange
- RV-N Motor Flange
- Oil Seals
- O Rings
- Assembly Bolts
- Simple Assembly Instructions

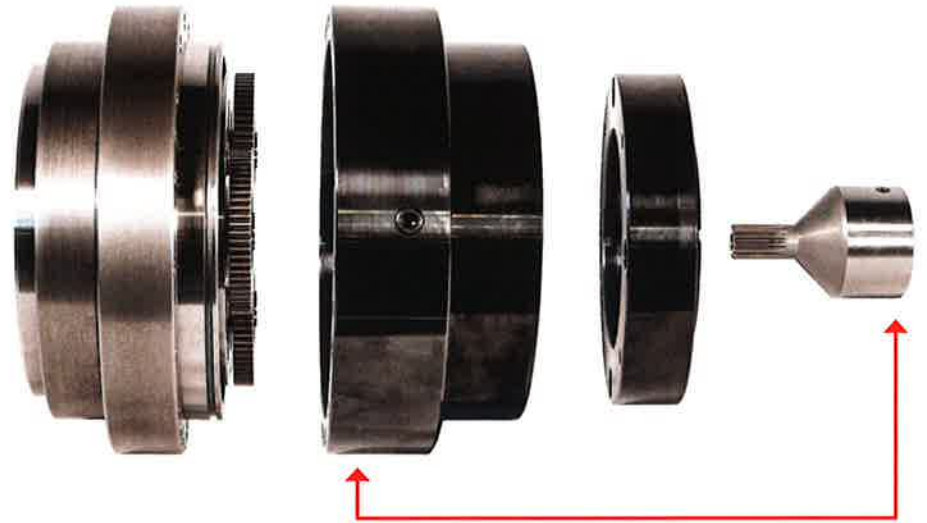

RV-N GEARBOX


RV-N KITS

RV-N SERIES

Specification	Unit	80N	160N	380N	500N	700N
Allowable Acceleration Torque	Nm	1960	4000	9310	12250	17500
Allowable Moment	Nm	2150	4000	7050	11000	15000
Allowable Speed	rpm	88	48	27	25	19

RV-N KITS

Model		80N	160N	380N	500N	700N
Weight:	[kg]	24	44	92	112	172
A	[mm]	140	179	222	253	315
B	[mm]	160	202	252	284	353
C	[mm]	189	238	295	325	395
D	[mm]	177	215.5	272.7	278	312
E	[mm]	165	202	254	284	352
F	[mm]	110	110	114.3	114.3	114.3
G	[mm]	19	24	35	35	35
H	[mm]	145	145	200	200	200

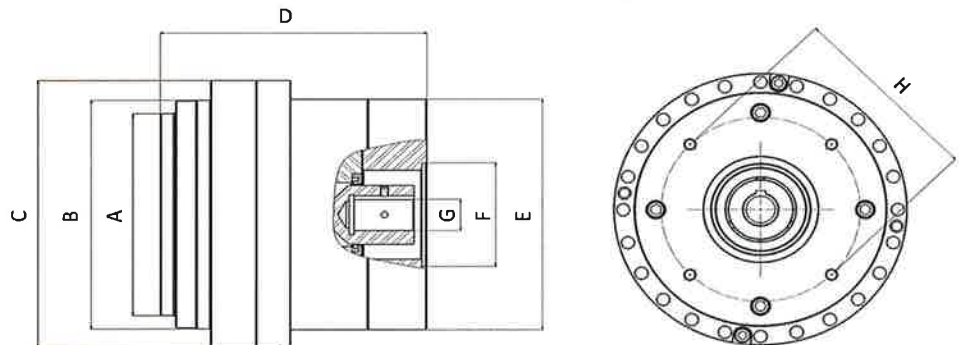

Nabtesco



1-866-74-TOUGH

sales@nabtescomotioncontrol.com
 engineering@nabtescomotioncontrol.com
 www.NabtescoMotionControl.com